


Two Types of Retention Modes are Described in this Application Note

Four Compounds were well retained and separated in both HPLC Modes shown in Figures A and B; however, the Retention Order was changed depending on the Gradient used. It is worth noticing that the peak intensities were three times higher when using Gradient "A" (ANP mode) compared to Gradient "B" (RP mode).

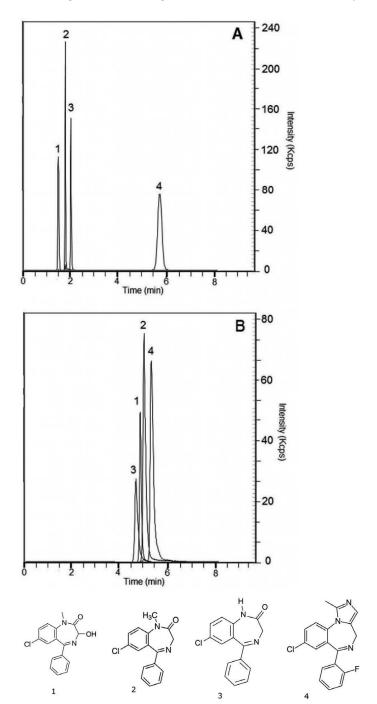

Peaks:

Printed from the Chrom Resource Center Copyright 2024, All Rights Apply

1. Temazepam 301.0739 m/z [M+H]+

MicroSolv Technology Corporation
2. Diazepam 285.0790 [M+H]+ 9158 Industrial Blvd. NE, Leland, NC 28451

3. Nordiazepam 271.0633 [M+H]+

tel. (732) 380-8900, fax (910) 769-9435

4. Midazolam 326.0855 [M+H]+

Email: customers@mtc-usa.com

Website: www.mtc-usa.com



Method Conditions

Column: Cogent Diol™, 4.4µm, 100Å

Catalog No.: 40060-05P-2 **Dimensions:** 2.1 x 50mm

Mobile Phase:

A: DI Water with 0 .1% Formic Acid (v/v)
B: Acetonitrile with 0.1% Formic Acid (v/v)

Gradient:

Figure A		Figure B		
Time (minutes)	%B	Time (minutes)	%B	
0	85	0	10	
6	70	6	10	
7	20	7	50	
9	20	9	50	
10	85	10	10	

Post time: 3 minutes
Injection vol.: 1µL

Flow rate: 0.4ml / minute

Detection: ESI - POS - Perkin Elmer AxION 2 TOF Mass Spectrometer

Flow rate: 0.4ml / minute

Sample Preparation: Extraction Method: Spiked urine sample was loaded into SPE cartridge I (Clean Screen Xcel[™] purchased from UCT Bristol, PA, USA) and eluted with 0.78mL of Acetonitrile, 200μL of 2-Propanol, 20μL of Ammonia. After the elution, the Sample was dried under Nitrogen gas and dissolved in 100μL of 50:50 Methanol / DI Water / 0.1% Formic Acid. Before injection, the 10ppm spiked Sample was filtered through a 0.45μm Nylon Syringe Filter (MicroSolv Tech Corp).

Notes: Benzodiazepines are prescribed for conditions such as anxiety disorders, insomnia, seizures, and alcohol withdrawal. However, they also have potential for abuse as recreational drugs.



Printed from the Chrom Resource Center Copyright 2024, All Rights Apply

MicroSolv Technology Corporation

9158 Industrial Blvd. NE, Leland, NC 28451

Email: customers@mtc-usa.com

Website: www.mtc-usa.com